

## MULTIFREQUENCY ANTENNA MULTI FM

The **MULTI FM** antenna is designed to be adjusted to the desired frequency by the user, so it is recommended for those low-power stations which still do not have an assigned transmission frequency.




### GENERAL CHARACTERISTICS

<b>TYPE</b>	1/4 ground plane
<b>FREQUENCY RANGE</b>	87.5-108MHz
<b>IMPEDANCE</b>	50 Ohm
<b>MAXIMUM POWER</b>	350W
<b>GAIN</b>	2.15dBi
<b>POLARIZATION</b>	Vertical
<b>INPUT CONNECTOR</b>	N(F)
<b>WEIGHT</b>	1.1Kg
<b>ASSEMBLY</b>	30-45mm tube
<b>MATERIAL</b>	Stainless steel
<b>TYPICAL ROE</b>	1.2:1
<b>RADIAL LENGHT</b>	810mm
<b>RADIANT LENGHT</b>	1080mm


broadcast your \_ world



### MULTIFREQUENCY ANTENNA

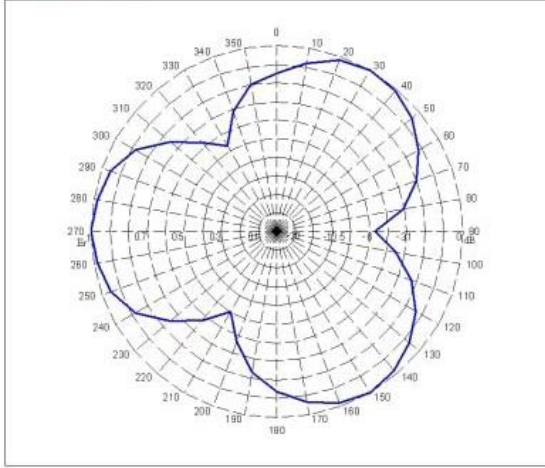

HORIZONTAL RADIATION PATTERN

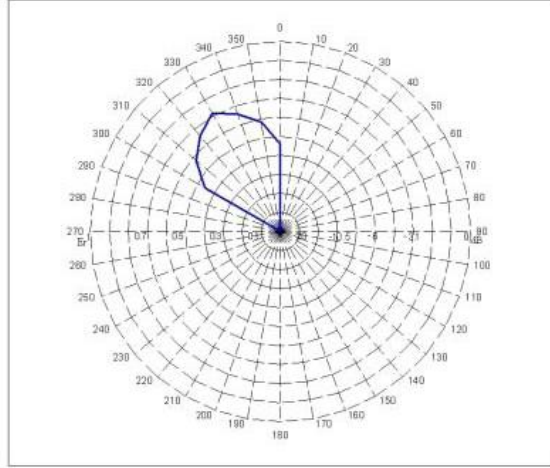

VERTICAL RADIATION PATTERN

*\* The images and/or technical specifications are subject to change without previous notice.*

broadcast your \_ world

**OMB BROADCAST**  
[www.omb.com](http://www.omb.com)

**OMB EUROPA**  
C/ Paraguay 6, P.I. Centrovía  
50198 La Muela  
Zaragoza, España  
[europa@omb.com](mailto:europa@omb.com)  
[comercial@omb.com](mailto:comercial@omb.com)

**OMB AMÉRICA**  
3100NW 72nd. Ave. Unit 112  
MIAMI, Florida 33122  
USA  
[usa@omb.com](mailto:usa@omb.com)